
USB 8 Relay Output Board

DATASHEET

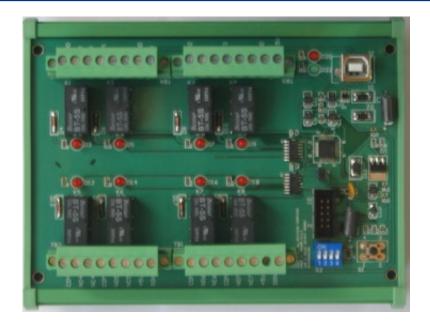

USB 8 Relay Output Board

Product Code:

AUSB8RELAY USB 8 RELAY OUTPUT BOARD

Bus: USB 2.0 / RS-232/422/485


Description: 8 relay output channels

8 DPDT-Relays - 2 x COM/NO/NC

Max switching current: 1A

Max contact rating for relay: 220V AC / 150V DC

8 LED correspond to output ports activation status.



Features:

For direct DIN-Rail mounting Also as board without DIN Rail adapter available

High Speed 8051 μ C Core USB 2.0 Function Controller Support USB ID 0~14 SET

Support RS-232/422/485 Communicate Power from external DC+5V 1A (≥ 1A)

Software/Driver:

Support Windows XP/Vista/7/8, Windows server 2003/2008/2012; Linux kernel version 2.4 or the later and the sample for programming.

Package includes the following items:

USB 8RELAY Board USB cable Software and Manual CD

Operating temperature range: from 0 to 55°C.

Relative humidity range: from 0 to 90%.

Size: 160 mm x 120 mm x 55 mm

Connection:

Easily exchangeable connections and easily replaceable terminal blocks.

DECISION GROUP INC.



4/F No. 31, Alley 4, Lane 36, Sec.5 Ming-Shen East Road

Taipei, Taiwan, R.O.C.

Phone No: +886 2 2766-5753

Fax No: +886 2 2766 5702, 2756 9591 E - Mail: decision@ms1.hinet.net

decision@decision.com.tw

URL: www.decision.com.tw